# MUELLER®

# Milk Silo

### **Features and Benefits**

- Stainless steel alcove with built-in equipment.
- 3.5"(DN80) milk outlet with 2.5" butterfly valve and plug.
- Stainless steel covered, top-mounted agitator motor.
- Oval manhole located within the stainless steel
  alcove
- Safe ventilation of the silo within the alcove.
- Coated, weatherproof aluminium jacket.
- Available in capacities from 15 000 to 34 000 litres.
- Cage ladder supplied on 18 000 to 34 000 litres as standard.
- Stainless Steel jacket available as an option.



Stainless steel alcove with built-in MIII cooling & cleaning control system



The silo is coated in a weather proof aluminium jacket in a 'off-white' colour.


# **Built-on Stainless Steel Mueller MIII control unit with Quick Cleaning system**

- Built-in MilkGuard.
- Built-in cooling controls for robotic milking systems.
- Built-in cool start delay.
- Deep-cool switch.
- Cleaning water level control.
- Automated detergent and acid dosing.

### **Mueller Sales**

# MUELLER

## DIMENSIONS OF THE MUELLER SILO ALCOVE front view




\* Overall height of the alcove is measured from the concrete base

# Height

### **DIMENSIONS OF THE MUELLER SILO**

Concrete base for the silo should be 5 cm higher than the dairy floor

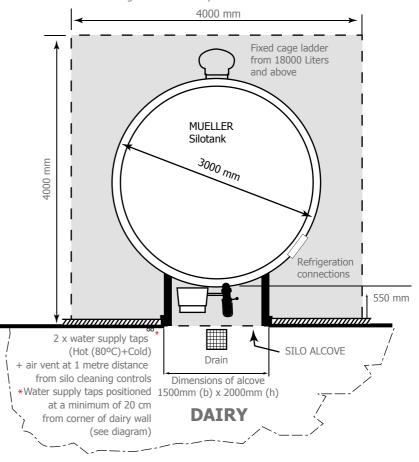

Max. content	Total
Litres	Height
15.000	3860 mm
18.000	4380 mm
20.000	4730 mm
24.000	5430 mm
28.000	6130 mm
30.000	6480 mm
34.000	7180 mm

### **Mueller Sales**

Narcisstraat 14

P.O.Box 138

9400 AC Assen

The Netherlands

T: +31 (0)592 361 600

F: +31 (0)592 361 601

E: info@muellerbv.com

Your Mueller dealer:

www.muellerbv.com